

M2

Live Condenser Microphone

RØDE[®]
MICROPHONES




Features

- Live condenser vocal microphone
- Feedback rejecting super-cardioid pick up pattern
- Locking on/off switch
- Heavy duty metal body
- High level of RF rejection
- Low handling noise
- Designed and manufactured in Australia
- Full 10 year warranty*


Specifications

| | | | |
|--------------------|--|---------------------|--|
| Acoustic Principle | Pressure gradient | Directional Pattern | Super-Cardioid |
| Frequency Range | 35Hz ~ 20,000Hz | Sensitivity | -44dB \pm 2dB re 1V/Pa (6.3mV @ 94 dB SPL) @ 1kHz |
| Nominal Impedence | 50 Ω | Equivalent Noise | 23dBA SPL (A - weighted per IEC651) |
| Maximum Output | +5.2dBu (@ 1% THD into 1k Ω) | Dynamic Range | 118dB (per IEC651) |
| Maximum SPL | 141dB (@ 1kHz, 1% THD into 1k Ω load) | Signal/Noise | 71dB SPL (A - weighted per IEC651) |
| Power Req. | 24/48V Phantom Power | Dimensions | Length - 187mm Diameter - 47mm |
| Output Connection | 3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground) | Shipping Weight | 545g |
| Net Weight | 308g | | |

Frequency Response

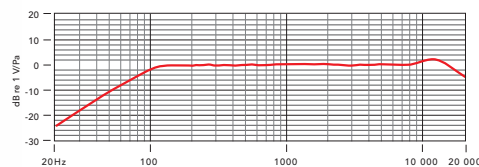

Polar Pattern



Included Accessories

- RM1 stand mount
- ZP1 zip pouch



www.rodemic.com

*After online registration

Australia
107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA
PO Box 4189 Santa Barbara CA 93140 USA
Ph: +1 805 566 7777 Fx: +1 805 566 0071