




MICROTUBES B7K
Analog Bass Preamp

USER MANUAL



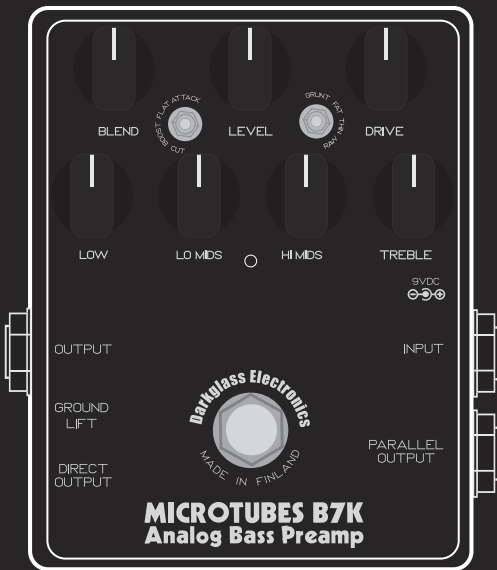

Microtubes B7K

Analog Bass Preamp

The Black Beast

The Microtubes B7K takes the powerful dynamic saturation circuit of the B3K and adds a four-band equalizer and a balanced line driver for even greater versatility. Designed for both studio and live use, it will take your direct sound to a whole new level.

Warning

The Microtubes B7K has a current draw of 30mA. Only use a regulated 9V DC adapter with a center-negative plug. Due to ecological reasons it does not accept batteries. Unregulated power supplies and/or higher voltages may result in suboptimal noise performance and even damage your unit, voiding the warranty.

Warranty

To activate the warranty, we encourage you to register your product on: <http://mypedal.darkglass.com> and enter the serial number on the back of your pedal.

Please contact us via email support@darkglass.com before shipping a product to us.

Controls

LEVEL: Sets the volume of the overdriven signal.

DRIVE: Sets the amount of saturation in the overdriven signal.

BLEND: Mixes the clean input signal with the overdriven signal.

GRUNT SWITCH: Sets the amount of low frequency content to saturate by selecting between three different bass boost levels before the clipping stage.

ATTACK SWITCH: Sets the amount of treble content to saturate: The “Boost” setting emphasizes the treble content extra clarity and presence. The “Flat” position leaves this register untouched while the “Cut” position will reduce the amount of high frequencies being saturated.

LOW: +-12dB @ 100Hz / **LOW MID:** +-12dB @ 1kHz

HI MID: +-12dB @ 2.8kHz / **TREBLE:** +-12dB @ 5kHz

PARALLEL OUTPUT: A passthrough for your input signal, useful for parallel processing.

DIRECT OUTPUT: A balanced version of the ¼” output, useful for running into PA's or studio mixing consoles.

Disclaimer

In the interest of continuous improvement, specifications are subject to change without notice. If you have any questions, please don't hesitate to contact us at www.darkglass.com

The manufacturer claims that the above product fulfills the requirements as set by EN55013, EN55020, EN60555-2, EN60555-3, RoHS, WEEE.



Your vision, our gear

HERNESAAREN RANTA 3L 00150
HELSINKI - FINLAND
TEL: +358 401504121
WWW.DARKGLASS.COM

FOLLOW US:

