



ProDI - mono DI
ProD2 - stereo DI

Following the footsteps of the Radial JDI, the ProDI is a high-quality ultra-compact passive direct box that has been specifically developed to allow regional sound companies and project studios to enjoy the quality of a Radial direct box at a more affordable price point.

The ProDI features a custom-made transformer that is able to handle high levels without saturation. This high-performance transformer has an exceptionally linear frequency response from 20Hz to 18kHz, making it ideal for electronic musical instruments and audio equipment. The ProDI also features a -15dB PAD for high output sources and ground lift switch to troubleshoot noise from ground loops. The ProDI is a great choice for bass and acoustic guitar.

ProD2 stereo version also available. The ProD2 is essentially two ProDI's in one compact enclosure designed for stereo keyboards, DJ equipment and consumer hi-fi systems. The ProDI and ProD2 are housed in an extremely rugged two piece 14 gauge steel enclosure with a book-end-designed outer shell that prevents damage to the switches.

Features

- Great sounding, rugged passive DI
- High performance custom-wound transformer
- -15dB PAD for wide range of input levels
- Ground lift switch eliminates ground loop hum

Applications

- ProDI for acoustic guitars and bass guitars
- ProD2 for stereo keyboards and drum machines
- Interface consumer audio with pro gear
- Eliminates buzz and hum caused by ground loops

Cool stuff

- Ultra-tough designed to last a lifetime
- 'Plug & play' easy-to-use
- Completely passive, no power needed
- 3 year transferable warranty



-15dB PAD allows super-hot inputs such as from a CD player to be connected.

FULL BOTTOM PAD improves electrical isolation and keeps ProDI from moving around on busy stages!

INPUT and THRU jacks connect from the instrument and to the instrument amplifier.



14 GAUGE STEEL ENCLOSURE with book-end design creates a protective zone around the switches & connectors.

GROUND LIFT disconnects the ground path to the transformer at the XLR output.

XLR balanced 600Ω mic-level output for runs to 1000 feet without appreciable noise.





HIGH PERFORMANCE transformer for distortion-free signal transfer and 100% isolation from ground loop hum.

MILITARY-GRADE PC BOARD is protected inside a welded I-beam enclosure eliminating stress that causes cold solder joints, the main cause of system failure.

ProDI



ProD2

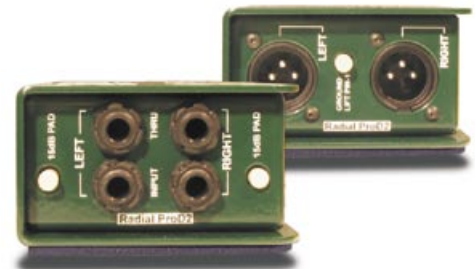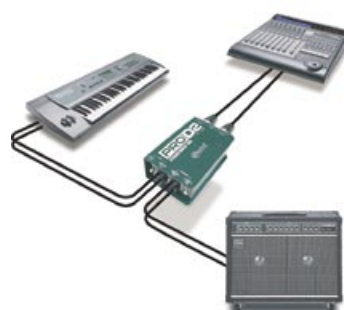

The ProD2 is two independant direct boxes in one package: two inputs, thru-puts, pads, transformers, outputs.